

Company name	
Reference number	
Part	LMA004-3/8-HO
Manufacturer	WOSP
Nominal current [A]	170A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	159 A	
Maximum output power	2567 W	
Max output current	186 A	
Ripple	3 A	
Leakage	0	
Maximum efficiency	28 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1711 rpm	
Motor power	9.2 kW	
Torque	15.1 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.8 V	
Status light RPM	508 rpm	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.2 V	
Duration of the procedure	48.4 s	
Three-phase voltage	412.3 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

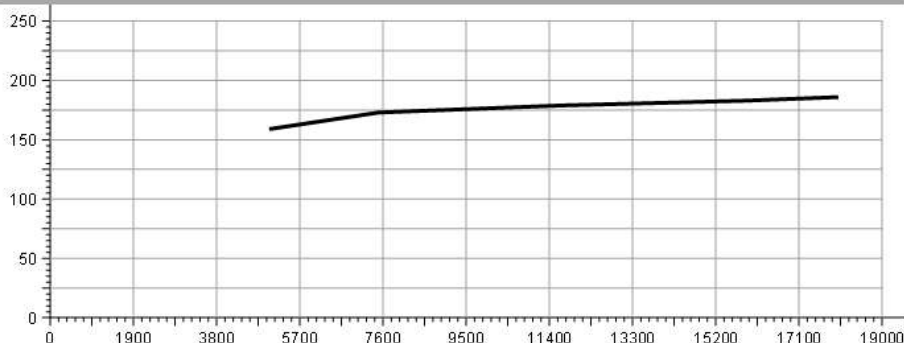

Data

[RPM]	Current [A]	Reference [A]
18000	186	
15898	183	
13806	181	
11698	179	
9597	176	
7498	173	
5000	159	

ADDRESS

WEB

E-MAIL

PHONE