

Company name	WOSPerformance
Reference number	
Part	LMA058
Manufacturer	WOSP
Nominal current [A]	70


Test results table

Parameter	Value	Reference
Output at low revolutions	36 A	
Maximum output power	1061 W	
Max output current	78 A	
Ripple	1 A	
Leakage	0	
Maximum efficiency	31 %	
Initial voltage	13.4 V	
Direction	CW	
Turn on speed	1594 rpm	
Motor power	3.4 kW	
Torque	8.3 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	5	
Charge lamp voltage	1.5 V	
Status light RPM	296 rpm	
VSP @2,500	14.6 V	
VSP @4,250	14.6 V	
VSP @6,000	14.6 V	
Duration of the procedure	41.5 s	
Three-phase voltage	406.9 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

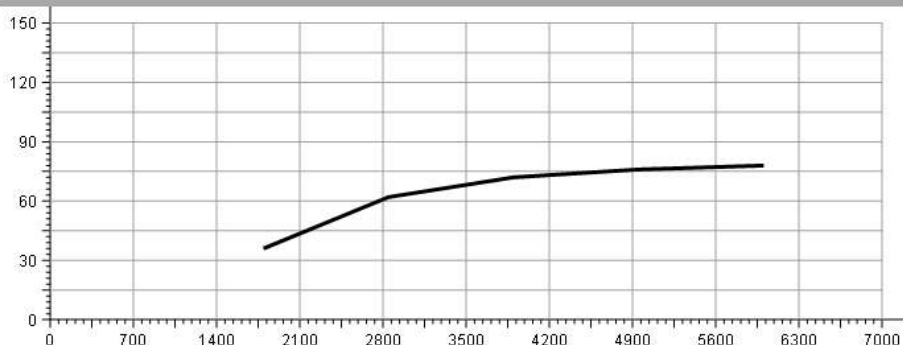

Data

[RPM]	Current [A]	Reference [A]
6003	78	
4952	76	
3899	72	
2845	62	
1794	36	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com