

Company name	WOSPerformance
Reference number	
Part	LMA267-HO
Manufacturer	
Nominal current [A]	170


Test results table

Parameter	Value	Reference
Output at low revolutions	164 A	
Maximum output power	2419 W	
Max output current	189 A	
Ripple	11 A	
Leakage	0	
Maximum efficiency	29 %	
Initial voltage	13.2 V	
Direction	CW	
Turn on speed	2437 rpm	
Motor power	8.3 kW	
Torque	13.7 Nm	
Rated voltage	12 V	
Output Voltage Tested	13 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.4 V	
Duration of the procedure	51.6 s	
Three-phase voltage	414 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

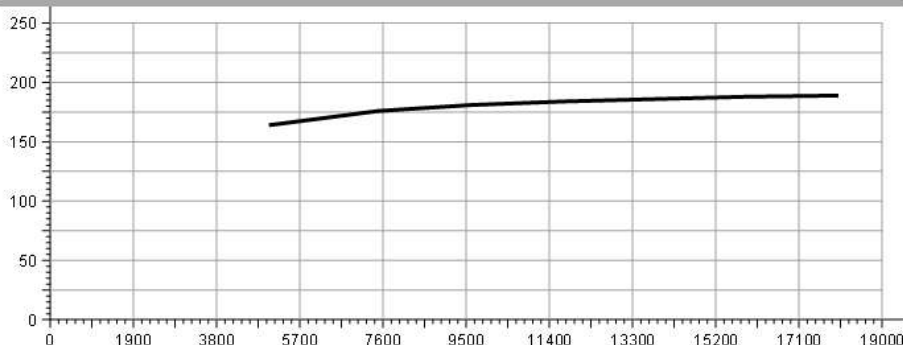

Data

[RPM]	Current [A]	Reference [A]
18003	189	
15905	188	
13803	186	
11702	184	
9600	181	
7495	176	
4994	164	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com