

Company name	WOSPerformance
Reference number	
Part	LMA267
Manufacturer	WOSP
Nominal current [A]	


Test results table

Parameter	Value	Reference
Output at low revolutions	61 A	
Maximum output power	1306 W	
Max output current	102 A	
Ripple	4 A	
Leakage	0	
Maximum efficiency	40 %	
Initial voltage	13.3 V	
Direction	CW	
Turn on speed	1474 rpm	
Motor power	3.3 kW	
Torque	8.4 Nm	
Rated voltage	12 V	
Output Voltage Tested	13 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	14.4 V	
VSP @4,250	14.4 V	
VSP @6,000	14.4 V	
Duration of the procedure	47.5 s	
Three-phase voltage	407.3 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

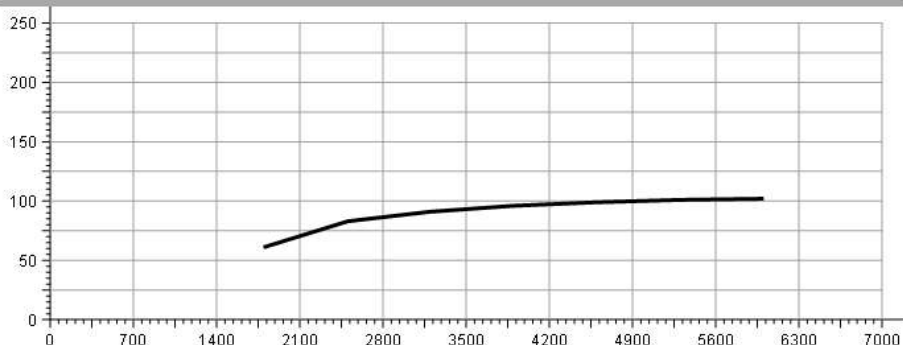

Data

[RPM]	Current [A]	Reference [A]
6003	102	
5302	101	
4597	99	
3895	96	
3194	91	
2505	83	
1794	61	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com