

Company name	
Reference number	
Part	LMA306
Manufacturer	WOSP
Nominal current [A]	175


Test results table

Parameter	Value	Reference
Output at low revolutions	78 A	
Maximum output power	2184 W	
Max output current	168 A	
Ripple	8 A	
Leakage	0	
Maximum efficiency	52 %	
Initial voltage	13.2 V	
Direction	CW	
Turn on speed	1212 rpm	
Motor power	4.2 kW	
Torque	13.8 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.2 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	300 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.7 V	
VSP @6,000	14.6 V	
Duration of the procedure	45.9 s	
Three-phase voltage	409 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

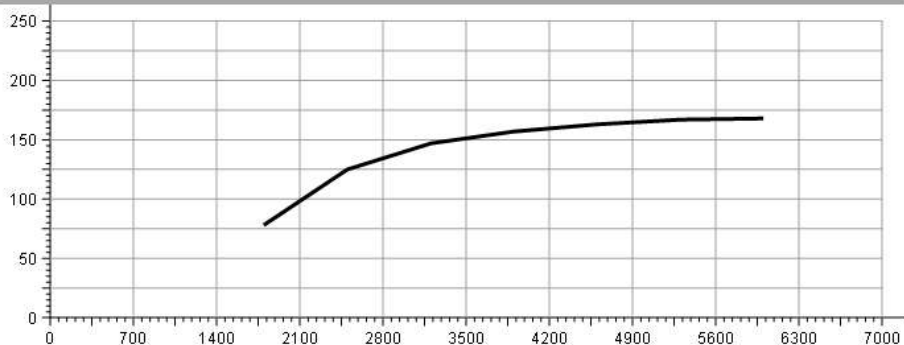

Data

[RPM]	Current [A]	Reference [A]
6000	168	
5308	167	
4600	163	
3904	157	
3204	147	
2500	125	
1796	78	

ADDRESS

WEB

E-MAIL

PHONE