

Company name	WOSPerformance
Reference number	
Part	LMA319-HO
Manufacturer	WOSP
Nominal current [A]	320


Test results table

Parameter	Value	Reference
Output at low revolutions	284 A	
Maximum output power	4603 W	
Max output current	336 A	
Ripple	10 A	
Leakage	0	
Maximum efficiency	36 %	
Initial voltage	13.1 V	
Direction	CW	
Turn on speed	2883 rpm	
Motor power	12.9 kW	
Torque	21.3 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.3 V	
Duration of the procedure	55.8 s	
Three-phase voltage	411.1 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

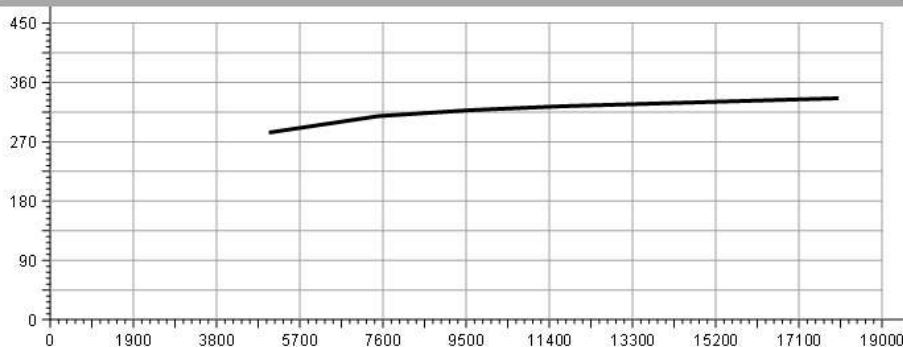

Data

[RPM]	Current [A]	Reference [A]
18006	336	
15877	332	
13797	328	
11705	324	
9600	318	
7502	309	
4994	284	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com