

Company name	WOSPerformance
Reference number	
Part	LMA321-HO
Manufacturer	WOSP
Nominal current [A]	170


Test results table

Parameter	Value	Reference
Output at low revolutions	152 A	
Maximum output power	2489 W	
Max output current	183 A	
Ripple	3 A	
Leakage	0	
Maximum efficiency	32 %	
Initial voltage	13.1 V	
Direction	CW	
Turn on speed	1825 rpm	
Motor power	7.8 kW	
Torque	12.8 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	500 rpm	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.8 V	
Duration of the procedure	51.3 s	
Three-phase voltage	412.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

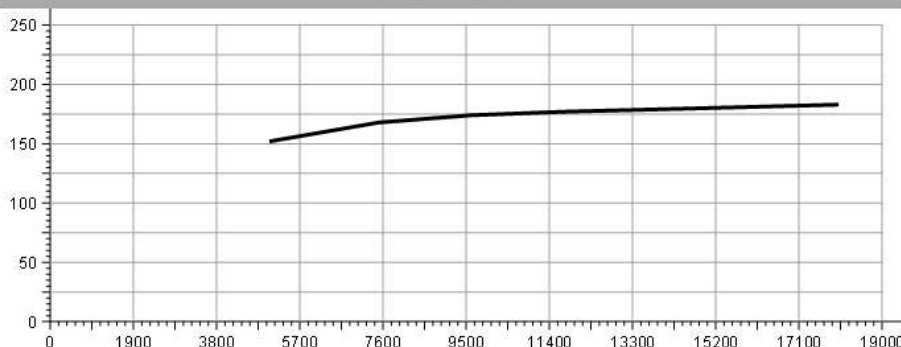

Data

[RPM]	Current [A]	Reference [A]
18004	183	
15904	181	
13804	179	
11708	177	
9596	174	
7508	168	
5004	152	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com