

Company name	
Reference number	
Part	LMA324
Manufacturer	WOSP
Nominal current [A]	120A

FAIL


Test results table

Parameter	Value	Reference
Output at low revolutions	78 A	
Maximum output power	1932 W	
Max output current	140 A	
Ripple	7 A	
Leakage	0	
Maximum efficiency	54 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1083 rpm	
Motor power	3.6 kW	
Torque	9.8 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
DFM PWM range high	99 %	
DFM PWM range low	17 %	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	54.2 s	
Three-phase voltage	410.1 V	

Connection definition

Parameter	Value	Reference
Alternator system	C HONDA	
C Regulation	No	

Activity chart

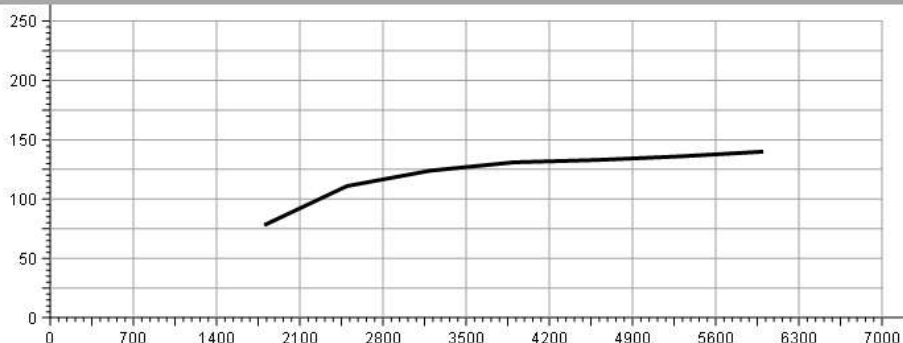

Data

[RPM]	Current [A]	Reference [A]
6000	140	
5303	136	
4600	133	
3903	131	
3200	124	
2497	111	
1800	78	

ADDRESS

WEB

E-MAIL

PHONE