

Company name	WOSPerformance
Reference number	
Part	LMA334-HO-SE
Manufacturer	WOSP
Nominal current [A]	170


Test results table

Parameter	Value	Reference
Output at low revolutions	156 A	
Maximum output power	2507 W	
Max output current	183 A	
Ripple	3 A	
Leakage	0	
Maximum efficiency	30 %	
Initial voltage	13.3 V	
Direction	CW	
Turn on speed	3831 rpm	
Motor power	8.4 kW	
Torque	13.7 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.3 V	
Duration of the procedure	54.8 s	
Three-phase voltage	410.6 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

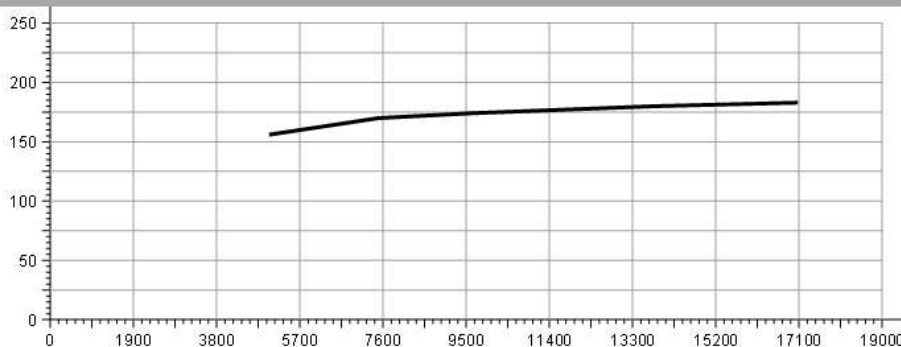

Data

[RPM]	Current [A]	Reference [A]
17074	183	
15983	182	
13797	180	
11706	177	
9600	174	
7500	170	
4997	156	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com