

Company name	WOSPerformance
Reference number	
Part	LMA338-MHO
Manufacturer	WOSP
Nominal current [A]	250


Test results table

Parameter	Value	Reference
Output at low revolutions	204 A	
Maximum output power	3427 W	
Max output current	252 A	
Ripple	12 A	
Leakage	0	
Maximum efficiency	31 %	
Initial voltage	13.2 V	
Direction	CW	
Turn on speed	2347 rpm	
Motor power	11 kW	
Torque	18.2 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	477 rpm	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.5 V	
Duration of the procedure	52.6 s	
Three-phase voltage	411.7 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

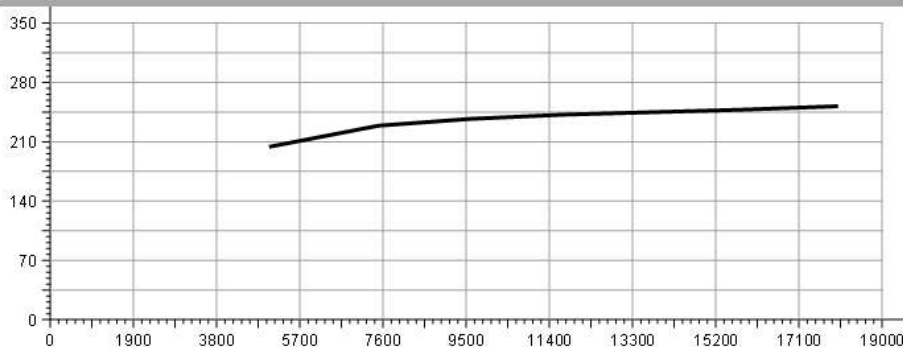

Data

[RPM]	Current [A]	Reference [A]
17993	252	
15900	248	
13803	245	
11703	242	
9597	237	
7497	229	
4997	204	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com