

Company name	WOSPerformance
Reference number	
Part	LMA362
Manufacturer	WOSP
Nominal current [A]	175


Test results table

Parameter	Value	Reference
Output at low revolutions	112 A	
Maximum output power	2399 W	
Max output current	179 A	
Ripple	3 A	
Leakage	0	
Maximum efficiency	46 %	
Initial voltage	13.2 V	
Direction	CW	
Turn on speed	1688 rpm	
Motor power	5.2 kW	
Torque	11.1 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	288 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	48.2 s	
Three-phase voltage	413.4 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

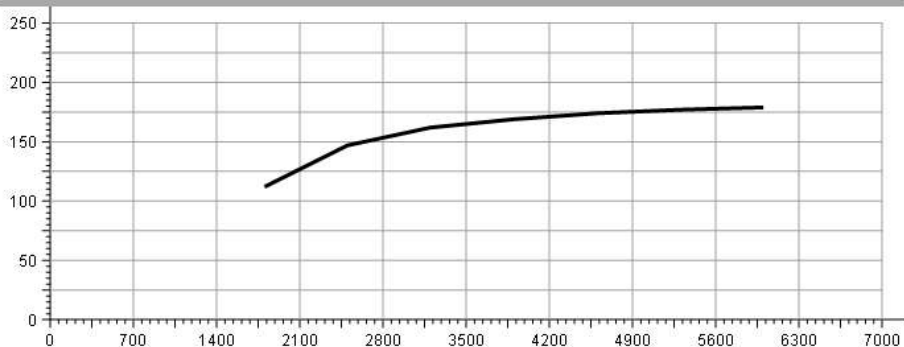

Data

[RPM]	Current [A]	Reference [A]
6000	179	
5296	177	
4600	174	
3904	169	
3200	162	
2501	147	
1803	112	