

Company name	
Reference number	
Part	LMA364
Manufacturer	WOSP
Nominal current [A]	95


Test results table

Parameter	Value	Reference
Output at low revolutions	59 A	
Maximum output power	1310 W	
Max output current	97 A	
Ripple	5 A	
Leakage	0	
Maximum efficiency	40 %	
Initial voltage	13.3 V	
Direction	CW	
Turn on speed	1200 rpm	
Motor power	3.3 kW	
Torque	7.7 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	293 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	48.7 s	
Three-phase voltage	416.2 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

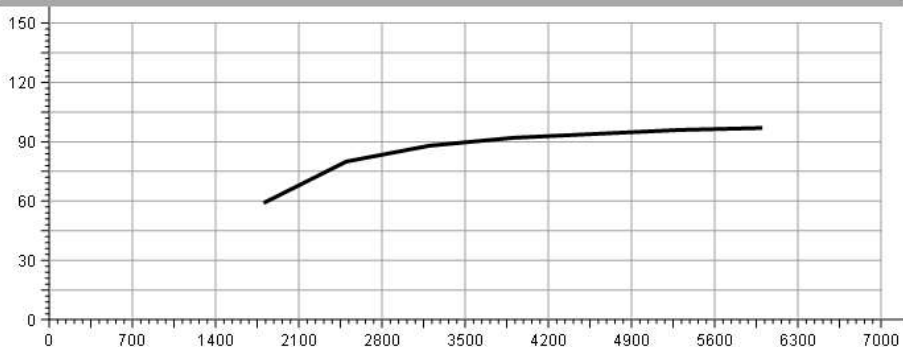

Data

[RPM]	Current [A]	Reference [A]
6000	97	
5299	96	
4600	94	
3904	92	
3197	88	
2499	80	
1803	59	

ADDRESS

WEB

E-MAIL

PHONE