

Company name	WOSPerformance
Reference number	
Part	LMA366-HO
Manufacturer	WOSP
Nominal current [A]	320


Test results table

Parameter	Value	Reference
Output at low revolutions	280 A	
Maximum output power	4368 W	
Max output current	326 A	
Ripple	6 A	
Leakage	0	
Maximum efficiency	37 %	
Initial voltage	13.5 V	
Direction	CW	
Turn on speed	2481 rpm	
Motor power	11.9 kW	
Torque	19.6 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	523 rpm	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.4 V	
Duration of the procedure	55.1 s	
Three-phase voltage	412.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

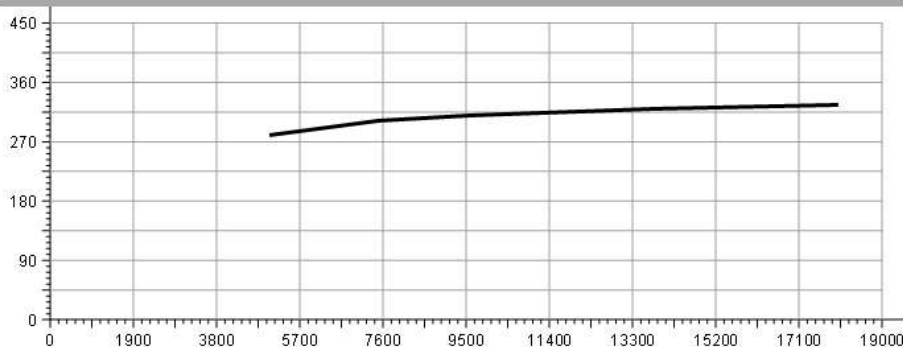

Data

[RPM]	Current [A]	Reference [A]
18000	326	
15890	323	
13800	320	
11700	315	
9597	310	
7497	302	
5003	280	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com