

Company name	WOSPerformance
Reference number	
Part	LMA385-DSL-MHO
Manufacturer	WOSP
Nominal current [A]	290


Test results table

Parameter	Value	Reference
Output at low revolutions	245 A	
Maximum output power	3913 W	
Max output current	292 A	
Ripple	8 A	
Leakage	0	
Maximum efficiency	27 %	
Initial voltage	13.1 V	
Direction	CW	
Turn on speed	900 rpm	
Motor power	14.6 kW	
Torque	23.9 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	503 rpm	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.6 V	
Duration of the procedure	52.3 s	
Three-phase voltage	408.3 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

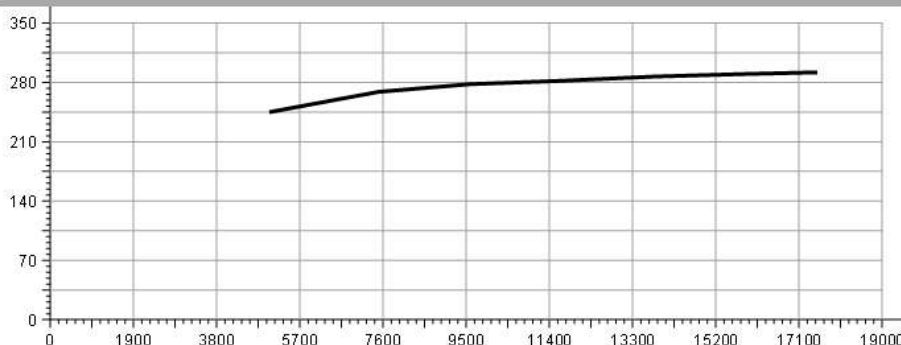

Data

[RPM]	Current [A]	Reference [A]
17521	292	
15862	290	
13791	287	
11703	282	
9594	278	
7506	269	
5003	245	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com