

Company name	
Reference number	
Part	LMA396-LO
Manufacturer	WOSP
Nominal current [A]	120

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	53 A	
Maximum output power	1849 W	
Max output current	138 A	
Ripple	6 A	
Leakage	0	
Maximum efficiency	49 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1278 rpm	
Motor power	3.8 kW	
Torque	9.7 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	297 rpm	
VSP @2,500	14.8 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	49.5 s	
Three-phase voltage	405.5 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

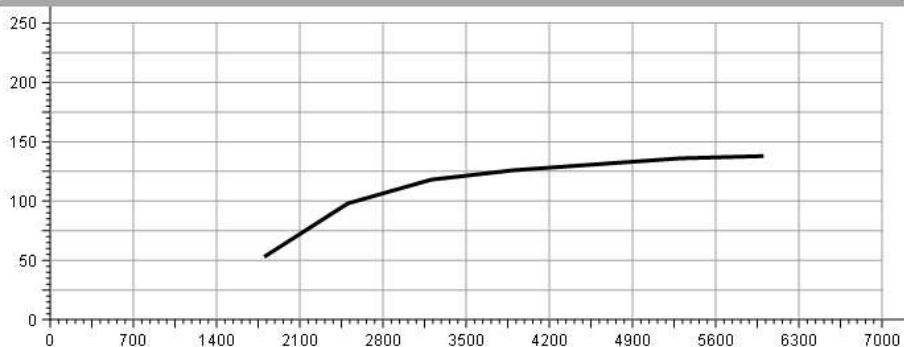

Data

[RPM]	Current [A]	Reference [A]
6003	138	
5300	136	
4597	131	
3897	126	
3203	118	
2503	98	
1800	53	

ADDRESS

WEB

E-MAIL

PHONE