

Company name	WOSPerformance
Reference number	
Part	LMA397-HO
Manufacturer	WOSP
Nominal current [A]	170

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	155 A	
Maximum output power	2470 W	
Max output current	183 A	
Ripple	7 A	
Leakage	0	
Maximum efficiency	28 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1747 rpm	
Motor power	8.8 kW	
Torque	14.5 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	497 rpm	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.8 V	
Duration of the procedure	50.5 s	
Three-phase voltage	411 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

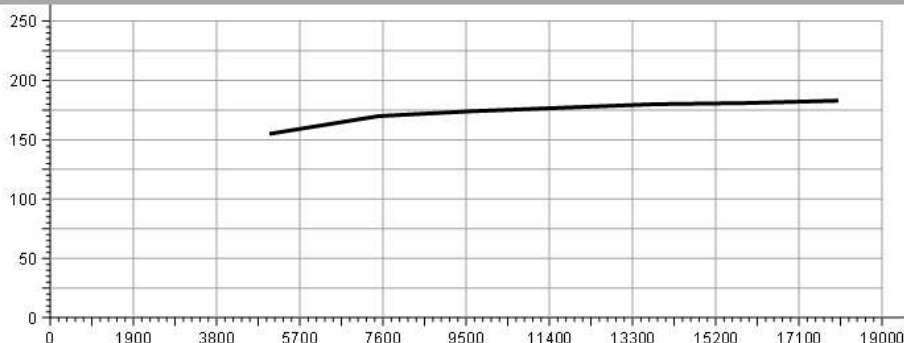

Data

[RPM]	Current [A]	Reference [A]
18000	183	
15900	181	
13797	180	
11700	177	
9600	174	
7503	170	
5003	155	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com