

Company name	WOSPerformance
Reference number	
Part	LMA397
Manufacturer	WOSP
Nominal current [A]	95


Test results table

Parameter	Value	Reference
Output at low revolutions	52 A	
Maximum output power	1323 W	
Max output current	98 A	
Ripple	3 A	
Leakage	0	
Maximum efficiency	39 %	
Initial voltage	13.2 V	
Direction	CW	
Turn on speed	1267 rpm	
Motor power	3.4 kW	
Torque	9.3 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	297 rpm	
VSP @2,500	14.8 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	40.4 s	
Three-phase voltage	414.5 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

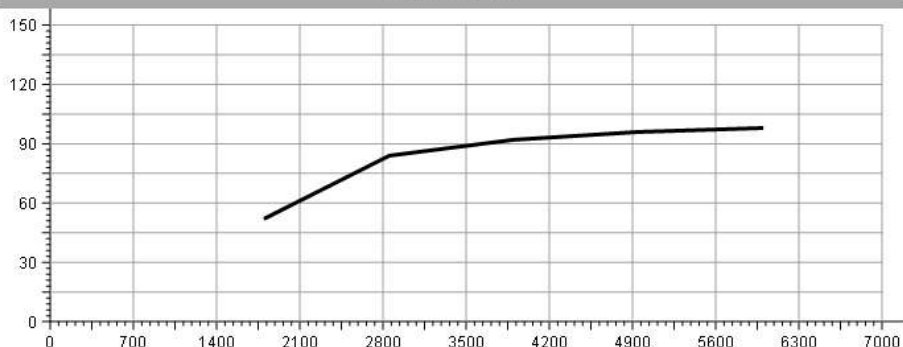

Data

[RPM]	Current [A]	Reference [A]
6000	98	
4947	96	
3897	92	
2853	84	
1797	52	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com