

Company name	WOSPerformance
Reference number	
Part	LMA433-10
Manufacturer	WOSP
Nominal current [A]	175

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	109 A	
Maximum output power	2394 W	
Max output current	176 A	
Ripple	5 A	
Leakage	0	
Maximum efficiency	48 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	982 rpm	
Motor power	5 kW	
Torque	12.5 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.2 V	
Status light RPM	283 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.4 V	
VSP @6,000	14.4 V	
Duration of the procedure	48.3 s	
Three-phase voltage	410.6 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

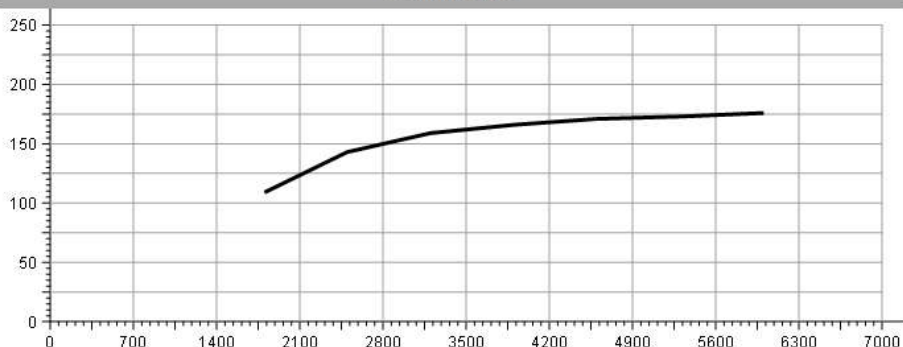

Data

[RPM]	Current [A]	Reference [A]
6003	176	
5305	173	
4600	171	
3905	166	
3200	159	
2498	143	
1803	109	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com