

Company name	WOSPerformance
Reference number	
Part	LMA488-MHO
Manufacturer	WOSP
Nominal current [A]	250


Test results table

Parameter	Value	Reference
Output at low revolutions	210 A	
Maximum output power	3602 W	
Max output current	261 A	
Ripple	5 A	
Leakage	0	
Maximum efficiency	32 %	
Initial voltage	13.3 V	
Direction	CW	
Turn on speed	1073 rpm	
Motor power	11.3 kW	
Torque	18.8 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.5 V	
Duration of the procedure	50.8 s	
Three-phase voltage	414.1 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

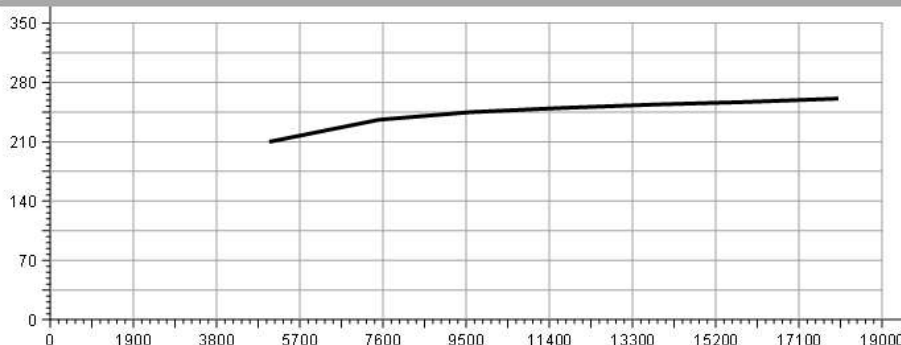

Data

[RPM]	Current [A]	Reference [A]
18003	261	
15889	257	
13800	254	
11702	250	
9600	245	
7505	236	
5000	210	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com