

Company name	WOSPerformance
Reference number	
Part	LMA518-6PK-50-SE
Manufacturer	WOSP
Nominal current [A]	240


Test results table

Parameter	Value	Reference
Output at low revolutions	153 A	
Maximum output power	3425 W	
Max output current	250 A	
Ripple	12 A	
Leakage	0	
Maximum efficiency	52 %	
Initial voltage	13.3 V	
Direction	CW	
Turn on speed	2977 rpm	
Motor power	6.6 kW	
Torque	20.4 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	12.7 V	
VSP @4,250	14.3 V	
VSP @6,000	14.3 V	
Duration of the procedure	67.8 s	
Three-phase voltage	412.2 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

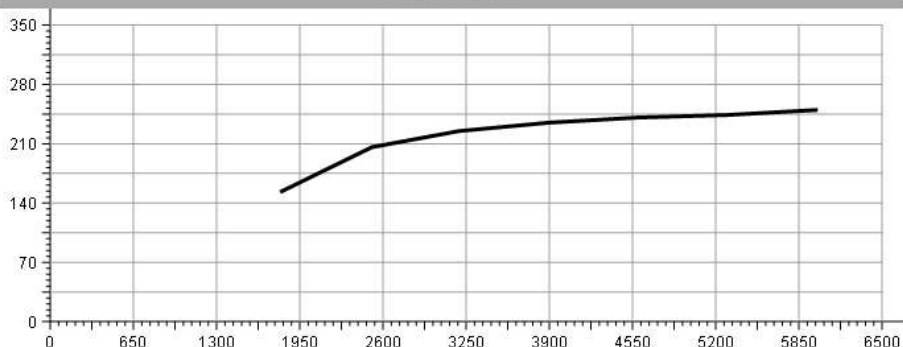

Data

[RPM]	Current [A]	Reference [A]
5996	250	
5291	244	
4596	241	
3898	235	
3192	225	
2513	206	
1796	153	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com