

Company name	WOSPerformance
Reference number	
Part	LMA561
Manufacturer	WOSP
Nominal current [A]	175

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	102 A	
Maximum output power	2372 W	
Max output current	177 A	
Ripple	8 A	
Leakage	0	
Maximum efficiency	52 %	
Initial voltage	13.3 V	
Direction		
Turn on speed	1076 rpm	
Motor power	4.6 kW	
Torque	12.3 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.9 V	
Status light RPM	298 rpm	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	47.7 s	
Three-phase voltage	407.3 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

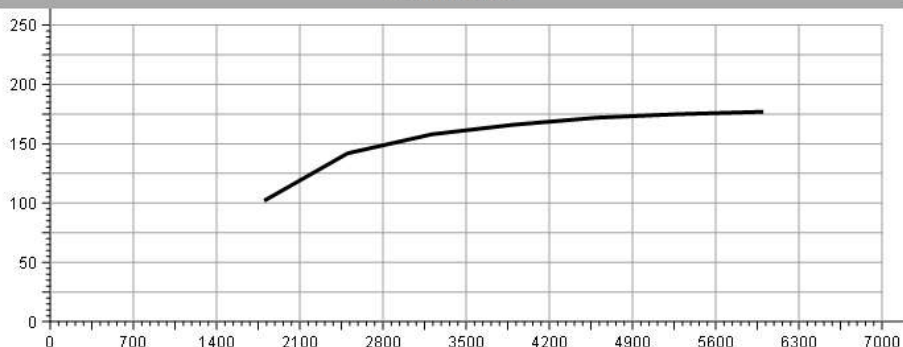

Data

[RPM]	Current [A]	Reference [A]
6000	177	
5292	175	
4600	172	
3895	166	
3210	158	
2502	142	
1800	102	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com