

Company name	WOSPerformance
Reference number	
Part	LMA565
Manufacturer	WOSP
Nominal current [A]	175


Test results table

Parameter	Value	Reference
Output at low revolutions	95 A	
Maximum output power	2329 W	
Max output current	170 A	
Ripple	3 A	
Leakage	0	
Maximum efficiency	49 %	
Initial voltage	13.4 V	
Direction	CW	
Turn on speed	1815 rpm	
Motor power	4.8 kW	
Torque	14.1 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	300 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.4 V	
VSP @6,000	14.5 V	
Duration of the procedure	49.9 s	
Three-phase voltage	410.6 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

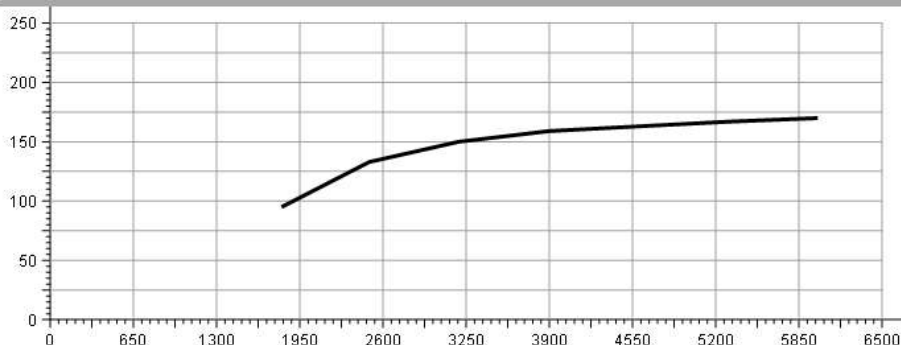

Data

[RPM]	Current [A]	Reference [A]
5996	170	
5307	167	
4593	163	
3896	159	
3189	150	
2493	133	
1807	95	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com