

Company name	WOSPerformance
Reference number	
Part	LMA609-HO-SE
Manufacturer	WOSP
Nominal current [A]	170


Test results table

Parameter	Value	Reference
Output at low revolutions	151 A	
Maximum output power	2462 W	
Max output current	181 A	
Ripple	10 A	
Leakage	0	
Maximum efficiency	32 %	
Initial voltage	13.3 V	
Direction	CCW	
Turn on speed	4177 rpm	
Motor power	7.7 kW	
Torque	12.5 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.3 V	
Duration of the procedure	54.5 s	
Three-phase voltage	412.9 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

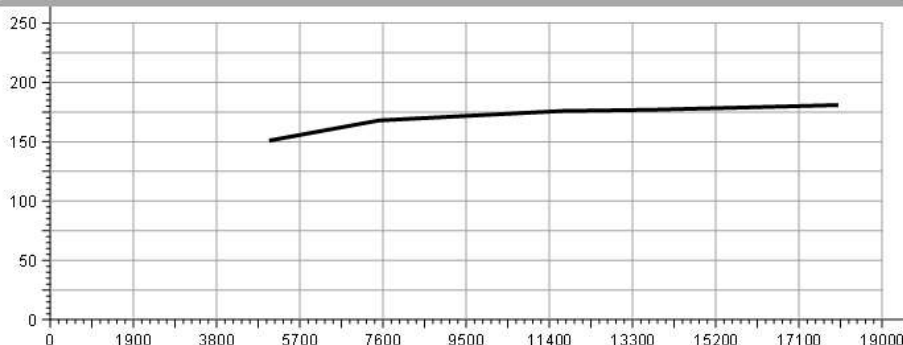

Data

[RPM]	Current [A]	Reference [A]
18003	181	
15900	179	
13793	177	
11703	176	
9597	172	
7507	168	
4997	151	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com